


NASA TECHNICAL NOTE




NASA TN D-3169

NASA TN D-3169

LOAN COPY: RETURN
AFWL (WLIL-2)
KIRTLAND AFB, N MI

0130039



TECH LIBRARY KAFB, NM

A SOFT X-RAY PHOTOIONIZATION DETECTOR

by R. M. Young and A. K. Stober

*Goddard Space Flight Center
Greenbelt, Md.*



A SOFT X-RAY
PHOTOIONIZATION DETECTOR

By R. M. Young and A. K. Stober

Goddard Space Flight Center
Greenbelt, Md.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

For sale by the Clearinghouse for Federal Scientific and Technical Information
Springfield, Virginia 22151 - Price \$1.00

ABSTRACT

In this paper, a direct-current, gas-filled ionization chamber, which is a simple ceramic radiation detector used in solar and astrophysical observations from rockets and satellites, is discussed.

The detector consists of a ceramic shell incorporating a beryllium window and containing xenon fill gas. The sensitivity is determined by the ion-pair yield and spectral absorption characteristics of xenon along with the transmission properties of beryllium. The fabrication technique for this detector and some observed operating characteristics are also described.

CONTENTS

ABSTRACT	ii
INTRODUCTION	1
ION-CHAMBER SHELL	1
WINDOW MATERIAL	2
CHAMBER ASSEMBLY	2
PREPARATION AND PLATING PROCEDURES OF WINDOW DISCS	3
MOUNTING AND ASSEMBLY PROCEDURES OF SHELL AND WINDOW	3
LEAK TESTING AND GAS FILLING	4
DETECTOR CHARACTERISTICS	6
APPLICATIONS	6
ACKNOWLEDGMENT	6
References	7

A SOFT X-RAY PHOTOIONIZATION DETECTOR

by

R. M. Young

and

A. K. Stober

Goddard Space Flight Center

INTRODUCTION

One of the simplest radiation detectors used in solar and astrophysical observations from satellites is the direct-current, gas-filled ionization chamber. The observer, by selecting combinations of window materials and fill gases, may have, at his disposal, a spectrally selective detector with a fairly narrow pass-band. Such a detector requires only a voltage source and a high impedance electrometer to yield a direct measurement of those radiation fluxes which fall within its particular pass-band.

Previously, such detectors have employed synthetically cleaved LiF, CaF, or BaF₂ as window materials and have been filled with gases such as nitric oxide, acetone vapor, and carbon disulfide. Such combinations have convenient spectral pass-bands in the 1150 Å to 1350 Å region (References 1 and 2). Recently, the Goddard Space Flight Center has developed a reliable technique applicable to the construction, evacuation and gas filling of these detectors.

As interest in solar X-rays increased, it became desirable to extend these techniques to the development of detectors employing thin aluminum or beryllium foil windows filled with one of the noble gases. This paper describes the fabrication techniques for these chambers along with some observed characteristics.

ION CHAMBER SHELL

The ion chamber shell is identical to that described by Stober, Scolnick, and Hennes (Reference 1). Briefly, the shell is fused of high density alumina whose basic profile is shown in Figure 1. The interior surface is sequentially coated with molybdenum manganese (metalizing), a flashplating of nickel, a plating of copper, and a sintered gold plate. Brazed into the unplated rear face of the shell are a Kovar central pin electrode, a guard ring and connector, and a copper gas-fill tube which also serves as the electrical connection to the plated-shell electrode.

WINDOW MATERIAL

The window material used in the detector is hot-rolled beryllium foil having a diameter of 0.860", chosen so as to fit the shell seat and a thickness of 0.005" (Figure 1).

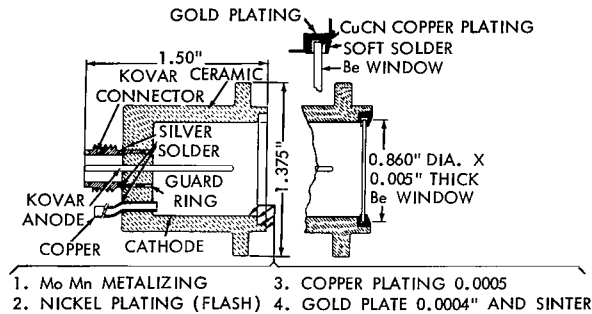


Figure 1 - NASA Ion Chamber

Although it would certainly be desirable for the observer to employ thinner windows, it does not seem currently practical for a number of reasons. First, a thinner foil window cannot support a 14.7 psi pressure differential over a 0.860" diameter disc without additional mechanical support on both sides as this would be necessary during the evacuation and gas-fill procedure as well as in flight applications. Such supports are very difficult to assemble and thus reduce the effective window area by about 50 percent. Secondly, the quality of beryllium foil available

is poor. Microphotographs of a cross-section of foil exhibit deep voids that often extend through the foil, creating pin holes, which cause gas leakage (Reference 3). These voids substantially reduce the mechanical strength of the material, all of which makes thinner foil undesirable for permanently sealed detectors unless high selectivity of window discs is possible. Because chlorine will etch a beryllium surface, thereby ruining a thin window, thin foil discs should be stored in a dessicator box as protection against minute traces of chlorine in the air.

CHAMBER ASSEMBLY

The beryllium windows are bonded to the ceramic shell with 60/40 lead-tin solder (Figure 2) which is accomplished by preparing a special soldering surface around the periphery of the window disc, as solder will not ordinarily adhere to a beryllium surface. This surface is provided by masking the central area of the window and electroplating a copper surface around the exposed edge on which the copper surface is then used for the solder seal to the gold plated seat of the ceramic shell. This technique is simple and appears to be reliable.

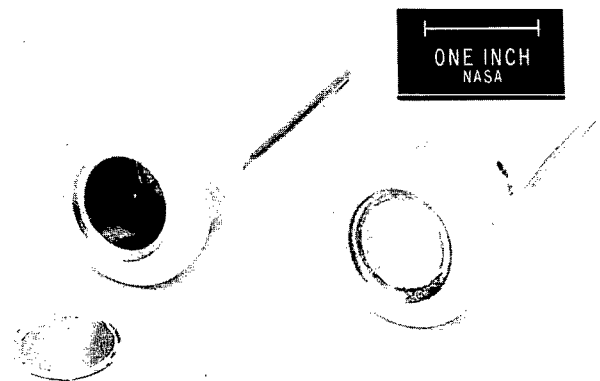


Figure 2 - Ion Detector Assembly

PREPARATION AND PLATING PROCEDURES OF WINDOW DISCS

The preparation and plating procedure of the foil disks is as follows:

1. Ultrasonically clean the Be disks in an acetone bath for thirty minutes. Remove the discs and allow them to dry.
2. Apply the masking clamp. This clamp, similar to a "C" clamp, has a circular teflon pad for each jaw, and masks off the effective window area from the plating solution. The pad leaves an exposed edge approximately 3/32" wide.
3. Dip the window into an all-purpose alkali plating cleaner, agitating the window while in solution.
4. Water rinse and dip into a 15 percent HCL solution for about two seconds and again water rinse. This etches the surface which helps to assure a stronger plated bond.
5. Immediately place the window in a cyanide copper-rochelle salt solution at a temperature of 130°F. Give the window a high current strike at 6 volts for about two seconds. This initiates the plating action before any oxidation can occur on the plating surface which, in turn, would cause a flaky copper plate.
6. Plate the window at a slower rate with two volts for five to ten minutes. The slower rate assures uniformity over the peripheral area and yields a surface which will not flake.
7. Remove the window from the plating bath, water rinse, and dry; the window is now ready for soldering.

The plating currents depend upon the area to be plated; thus in this case, currents of about 50 and 20 ma respectively were used. This particular CuCN solution has a current plating range of 20 to 60 amps/sq. ft.

Several plating solutions were tested in which it was found that a copper acid solution attacked the beryllium; nickel and silver did not plate with a strong bond to the Be; and gold plated unevenly, leaving pin spots of exposed Be over the plated surface. Thus, CuCN proved to be the most effective.

MOUNTING AND ASSEMBLY PROCEDURES OF SHELL AND WINDOW

The ceramic shell is then prepared for mounting by an ultrasonic bath in clean acetone for thirty minutes followed by a thirty-minute rinse in ethyl alcohol. This cleans the ceramic and plated surfaces thoroughly of grease and absorbed water. The shell is preheated to about 200°F on either a hot plate or in an oven and the shell's window seat is then fluxed and tinned with 60/40 lead-tin solder.

The shell is next cycled through the acetone/alcohol cleaner to thoroughly remove any rosin residue. Particular notice should be taken of the pin-guard ring area, as this is the shortest electrical leakage path in the shell itself. The shell is hot-air dried and is ready for the window mounting.

The beryllium window is prepared in a similar manner. Once again the center portion of the window is masked off for protective purposes and the copper plated edge is fluxed and thoroughly tinned. Care should be taken to assure tinning of the entire copper surface as this avoids mounting problems such as exposed plated copper flashing over the effective window area thereby ruining the window's transmission properties. Thorough cleaning of the masked assembly in an alcohol bath before removing the window from the assembly, and once again in a clean solution after removing the masking clamp is necessary. Care must be taken at all times to avoid contaminating the window as perspiration, for instance, could render the window ineffective.

The flux used throughout the above procedure is an alcohol-rosin flux which is acid free due to the fact that beryllium surfaces are immediately attacked by acid, and the fumes would dull the gold cathode of the shell. Both exposures measurably decrease the efficiency of a chamber and should always be avoided. The effective window area should at all times be protected from acid fumes, baths, and foreign matter.

The window and shell are now ready for assembly. The shell is mounted in a vertical position and slowly heated with a hydrogen flame. When the solder flow temperature is reached, the window is dropped onto its seat. The window's edge will quickly reach temperature and a smooth flow pattern should appear around the assembly's periphery. The flame may then be removed, allowing the solder to harden. Again, care should be taken to avoid an excess of solder whereby the solder could run down the walls of the cathode rendering the assembly useless.

After the chamber has cooled to room temperature, a thin coating of epoxy is applied to the soldered seam to assure a leak-free joint. It may be noted that although the copper-beryllium-solder-gold bond was leak tight in most cases, the epoxy seal coat improved the reliability and increased the fabrication yield. After the epoxy has cured, the chamber is ready for leak testing and gas filling.

LEAK TESTING AND GAS FILLING

Be-windowed ion chambers were assembled and leak tested successfully with a helium mass spectrometer exhibiting a maximum sensitivity of 2×10^{-10} cc/sec at 1 atmosphere. The chambers were then evacuated to 2×10^{-7} mm Hg pressure, and back-filled with the desired gas.

In all cases the assembled chambers have been found fit for gas filling if they pass a test such as indicated here.

The chambers are affixed to a He mass spectrometer whose sensitivity is about maximum. The chamber is evacuated and its internal volume exposed to the spectrometer detector tube whereupon the electrometer signal detector of the spectrometer is set to the most sensitive scale.

At this point a rough check of all seams is performed with a He gas jet. If the chamber exhibits no gross leaks, a plastic bag is placed over the chamber and filled with He. If after a five minute exposure to this arrangement no He ion signal is obtained, the chamber is considered fit

for gas filling. It is also worth noting that excessive atmospheric-vacuum cycling should be held to a minimum thus avoiding window fatigue or rupture.

Leaks may be stopped by applying epoxy, however, care should be taken in the area between the Kovar anode and the guard ring (see Figure 1). For example, if signals in the 5×10^{-13} ampere range are expected to be detected, it is best not to use an epoxy because a high electrical surface leakage path is developed across the epoxy itself which can contribute an error in the signal as high as 50 percent of full scale sensitivity when operating the chamber at 45 volts and at a slightly elevated temperature. If epoxy must be applied to this area, then one must be used whose dielectric properties are high. In a number of cases, the ceramic to the rear electrical connector seal and the fill tube developed minute holes either through rough use or through defective ceramic-to-metal fusion.

In the case of the type chamber used on OSO-1, the procedure was as follows: The chamber was affixed to a vacuum cycling system capable of reaching an ultimate pressure of 1×10^{-7} mm Hg. The chamber was then evacuated, first with a roughing pump and then with a liquid nitrogen baffled-oil diffusion pump, to an ultimate system pressure reading of about 2×10^{-6} mm Hg. To enhance outgassing of the chambers internal surfaces, it was warmed to a temperature of about 170°F which continued for 48 hours until a system pressure of about 3×10^{-7} mm Hg was reached. Upon assuming room temperature after removal of the heat, the chamber was ready for admittance of the fill gas.

These ion chambers may be filled with either argon or xenon. Although argon renders a sharper spectral absorption cut-off than xenon thereby shaping a narrower pass-band, xenon was used in this case because a wider pass-band was desired.

Research-grade xenon is available in lecture bottles with impurities of less than one part in 10^6 , therefore, double-freeze distillation techniques may be ignored, as the principal source of contamination of the gas will probably be from the system's walls during the gas transfer process.

When a system pressure of about 1200 mm Hg is reached, a lecture bottle is valved off from the manifold. The trapped gas in the gas handling system manifold is then frozen with liquid nitrogen into another glass bottle (trap bottle) which in turn is valved to the system. When an equilibrium system pressure is reached, the procedure is repeated in order to monitor the volume collected and to assure that excessive pressure will not occur in the trap bottle. This bottle is then isolated and the system's residual gas is pumped away. After a system pressure of about 2×10^{-7} mm Hg or less is obtained, the entire system is valved off from the vacuum pump. Gas from the trap bottle is then allowed into the evacuated ion chamber and manifold until a pressure of about 760 mm Hg is reached. The filled chambers are then valved off from the system. The chamber fill stem is now sealed off with a commercial pinch-off tool, snipped from the system, and the stem tip immersed in solder to assure the firmness of the cold weld joint.

DETECTOR CHARACTERISTICS

The spectral pass-band of these detectors is determined by the transmission properties of beryllium combined with the photoabsorption characteristics of xenon. Referring to S. J. M. Allen's data on the mass absorption coefficients of beryllium (Reference 4), a typical transmission curve for 0.005" thick Be is traced in Figure 3. Also shown is the absorption curve for xenon under the pressure and path length conditions as defined by the ion chambers (Reference 5). These two curves define a window approximately 8 Å wide which is ideally 100-percent efficient at its peak.

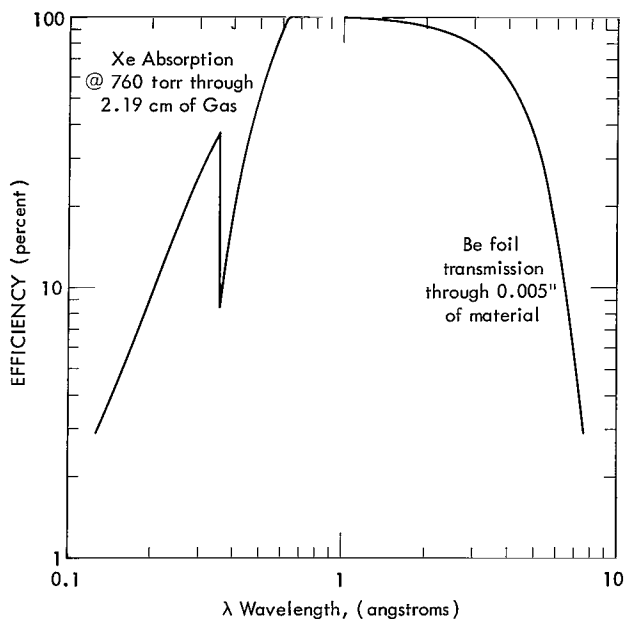


Figure 3 - Spectral Passband of a Beryllium Windowed Xenon Filled Ion Detector.

The energy loss per photon per ion pair created is chosen as the number most descriptive of the sensitivity of a gas detector. In this case, xenon renders an average energy loss for each created ion pair (Reference 5) of 22 ev or 2.8×10^{10} ion pairs/absorbed erg. If, for example, one used an electrometer capable of sensing a current of 1×10^{-13} amperes, an energy flux of 1.4×10^3 photons/cm²-sec could be measured at 6 kev. This assumes that photon interaction with the gas results only in photoionization, absorption of all photons, and all formed ion pairs are collected before recombination occurs. To date, the electrometer's current sensitivity limits the photon sensitivity of the detector at 6 kev. The low shell-to-anode diameter ratio prevents any practical increase in sensitivity when attempting to operate the detector as a gas-gain device at gas pressures in the order of an atmosphere.

APPLICATIONS

This detector, as described, has been used in several solar rocket probes, and was also flown in the pointed section of OSO-1, the latter being most fruitful in data yield for both quiet and active solar periods.

When operating this detector as a solar sensor, extreme caution should be exercised concerning interpretation of the intensity and spectral distribution of the input energy. The reader is referred to W. A. White's presentations on solar X-rays for further discourse on this problem (References 6 and 7).

ACKNOWLEDGMENT

The authors wish to pay special thanks to Mr. Charles Whitfield for his assistance in the beryllium plating process.

(Manuscript received June 25, 1965)

REFERENCES

1. Stober, A. K., "Ceramic Vacuum Ultraviolet Ion Chambers," NASA Technical Note D-1180, March 1962.
2. Stober, A. K., Scolnik, R., and Hennes, J. P., "A Vacuum Ultraviolet Photoionization Chamber," NASA Technical Note D-1715, March 1963.
3. Munford, J. A., Cantor, B. R., and Piltch, A., "Ultrasonic Welding of a Beryllium Window Assembly," NASA Technical Memorandum X-935, January 1964.
4. Compton, A. H., and Allison, S. K., *X-Rays in Theory and Experiment*, New York: D. Van Nostrand Co., Inc., 1936.
5. Curran, S. C., "The Proportional Counter as Detector and Spectrometer," in: *Handbuch der Physik, Band XLV: Instrumentelle Hilfsmittel der Kernphysik II*, ed. by S. Flugge, Berlin: Springer-Verlag, 1958, pp. 203.
6. White, W. A., "Solar X-Rays: Slow Variations and Transient Events," in: *Space Research IV: Proceedings of the 4th International Space Science Symposium, Warsaw, June 4-10, 1963*, ed. by P. Muller, Amsterdam: North Holland Pub. Co., 1964, pp. 771-779.
7. White, W. A., "Solar X-Rays: Comparison with Microwave Radiation," in: *AAS-NASA Symposium on the Physics of Solar Flares*, ed. by W. N. Hess, Washington, D. C.: National Aeronautics and Space Administration, NASA Special Publication SP-50, 1964, pp. 131-137.

3/22/87
9

"The aeronautical and space activities of the United States shall be conducted so as to contribute . . . to the expansion of human knowledge of phenomena in the atmosphere and space. The Administration shall provide for the widest practicable and appropriate dissemination of information concerning its activities and the results thereof."

—NATIONAL AERONAUTICS AND SPACE ACT OF 1958

NASA SCIENTIFIC AND TECHNICAL PUBLICATIONS

TECHNICAL REPORTS: Scientific and technical information considered important, complete, and a lasting contribution to existing knowledge.

TECHNICAL NOTES: Information less broad in scope but nevertheless of importance as a contribution to existing knowledge.

TECHNICAL MEMORANDUMS: Information receiving limited distribution because of preliminary data, security classification, or other reasons.

CONTRACTOR REPORTS: Technical information generated in connection with a NASA contract or grant and released under NASA auspices.

TECHNICAL TRANSLATIONS: Information published in a foreign language considered to merit NASA distribution in English.

TECHNICAL REPRINTS: Information derived from NASA activities and initially published in the form of journal articles.

SPECIAL PUBLICATIONS: Information derived from or of value to NASA activities but not necessarily reporting the results of individual NASA-programmed scientific efforts. Publications include conference proceedings, monographs, data compilations, handbooks, sourcebooks, and special bibliographies.

Details on the availability of these publications may be obtained from:

SCIENTIFIC AND TECHNICAL INFORMATION DIVISION
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
Washington, D.C. 20546